


# Häst Bipod Rescue Frame Selection Chart

Use this chart to help specify the frame that you need. Note: Dimensions are only approximate and are to be used only as a guide for selection. If you have specific size restrictions, please contact Häst for details.

It is recommended that the widest stance possible be selected. This gives more working room both at ground level and at heights so that the patient does not come in contact with the frame. In addition, a wide stance is more stable.

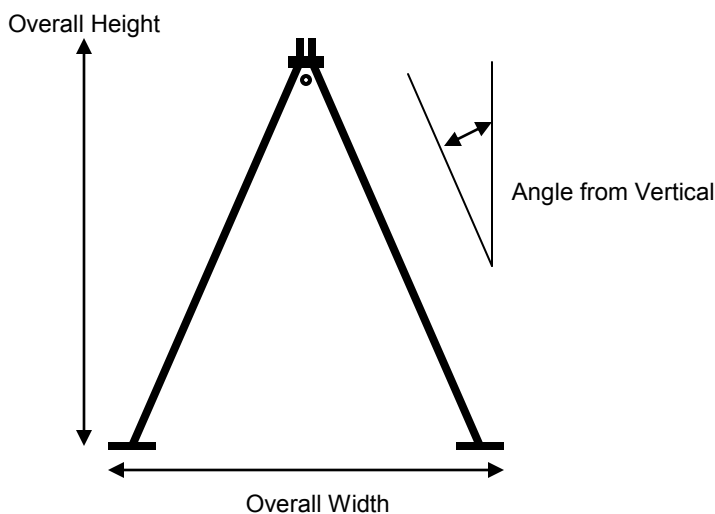

<u>Model</u>	<u>Angle from Vertical</u>	<u>Overall Height Range*</u>	<u>Overall Width Range**</u>
#16	16 Degrees	13' 2" - 20' 10"	9' 6" - 13' 10"
#18	18 Degrees	13' 0" - 20' 7"	10' 5" - 15' 4"
# 20	20 Degrees	12' 10" - 20' 4"	11' 4" - 16' 10"
# 22	22 Degrees	12' 8" - 20' 1"	12' 3" - 18' 3"
# 24	24 Degrees	12' 6" - 19' 10"	13' 2" - 19' 8"

\* The working height to the ring is approximately 16 inches less than the overall height.

\*\* The working width between the feet is 32 inches less than the overall width.